


Trapezoidal screw drives

Screw end treatment for movable/fixed bearing

Form S – W

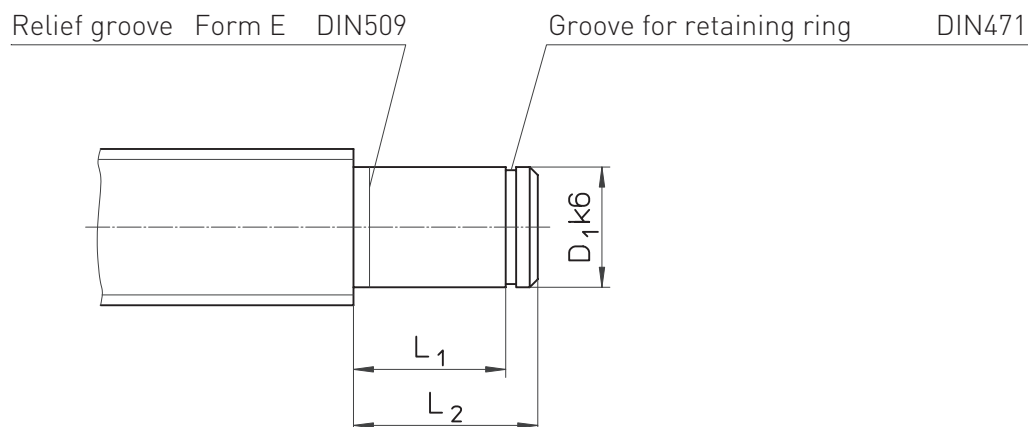

Form S

TGS	Dimensions [mm]			Spacer sleeve	Bearing
	D_1	L_1	L_2		
Tr18/20x...	12	40	45	18x12.1x24	6001 RS
Tr22/24/26x...	15	46	51	21x15.1x28	6002 RS
Tr28/30/32x...	20	53	58	27x20.1x29	6004 RS
Tr36x...	25	53	58	32x25.1x23	6205 RS
Tr40/44/48/50x...	30	60	68	40x30.1x28	6206 RS
Tr60x...	40	80	88	50x40.1x44	6208 RS
Tr70/80x...	55	102	110	65x55.1x60	6211 RS

Form T

TGS	Dimensions [mm]			Inner ring	Roller bearing
	D_1	L_1	L_2		
Tr18/20x...	12	40	45	2 IR 12x16x20	HK 1614 RS
Tr22/24/26x...	15	46	51	2 IR 15x20x23	HK 2018 RS
Tr28/30/32x...	20	53	58	2 LR 20x25x26.5	HK 2518 RS
Tr36x...	25	53	58	2 LR 25x30x26.5	HK 3018 RS
Tr40/44/48/50x...	30	60	68	2 LR 30x35x30	HK 3518 RS
Tr60x...	40	80	88	4 LR 40x45x20	HK 4518 RS

Form W

TGS	Dimensions [mm]			Cuscinetto
	D_1	L_1	L_2	
Tr14/16x...	10	8	12	6000 RS
Tr18/20x...	12	8	12	6001 RS
Tr22/24/26x...	15	9	13	6002 RS
Tr28/30/32x...	20	12	16	6004 RS
Tr36x...	25	15	20	6205 RS
Tr40/44/48/50x...	30	16	21	6206 RS
Tr60x...	40	18	25	6208 RS
Tr70/80x...	55	21	29	6211 RS

Form K: Produced specially to customer's drawing.