

MODULTEILUNG

À PAS MODULE MODULAR PITCH

gefräst fraissée milled
Quality 9-10

Module	(mm)
1 1.5 2 2.5 3 4 5 6	

Gerade verzahnt, gefräst

Material: Ck45
Profil: kaltgezogen h l l
Zahnung: 20° EW
Qualität: 9-10 DIN 3962/63/67
Fp (mm): 0.22
nicht teilungsgenau




Dentures droites, fraissées

Matière: Ck45
Profil: tiré h l l
Denture: 20° angle de pression
Qualité: 9-10 DIN 3962/63/67
Fp (mm): 0.22

Straight tooth, milled

Material: Ck45
Profil: cold formed h l l
Teeth: 20° pressure angle
Quality: 9-10 DIN 3962/63/67
Fp (mm): 0.22

Fp (1000 mm):
Teilungs-Gesamtabweichung
Erreur totale de pas
Cumulative pitch error

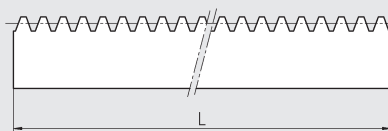

Part No.	p	Modul	L±10	b	h	h ₀	m(kg)
I29 103	3.141	1.0	1000	15	15	14.00	1.65
I29 104	3.141	1.0	2000	15	15	14.00	3.30
I29 113	4.712	1.5	1000	17	17	15.50	2.07
I29 114	4.712	1.5	2000	17	17	15.50	4.14
I29 123	6.283	2.0	1000	20	20	18.00	2.80
I29 129	6.283	2.0	2000	20	20	18.00	5.70
I29 133	7.854	2.5	1000	25	25	22.50	4.40
I29 134	7.854	2.5	2000	25	25	22.50	8.80
I29 143	9.425	3.0	1000	30	30	27.00	6.40
I29 144	9.425	3.0	2000	30	30	27.00	12.70
I29 153	12.566	4.0	1000	40	40	36.00	11.30
I29 154	12.566	4.0	2000	40	40	36.00	22.60
I29 163	15.708	5.0	1000	50	50	45.00	17.60
I29 164	15.708	5.0	2000	50	50	45.00	35.30
I29 173	18.850	6.0	1000	60	60	54.00	25.40
I29 174	18.850	6.0	2000	60	60	54.00	50.90

p (mm) Teilung, pas, pitch

